



10. Once connected you'll get a menu **'Device added successfully'**. Select the room your device is to be located. You can click on the pen to change the device name, then press **'Completed'**.
11. The smart device can now be controlled by the BrilliantSmart App.



12. If smart device setup is unsuccessful, go back to step 3, but click **'Resetting Devices'** and follow the steps to reset your smart camera. Try to connect your device again.



Go to brilliantsmart.com.au for full instructions and features.

Warning

1. BrilliantSmart App screens may differ due to application updates & improvements.
2. Please use the device as per instructions.
3. To prevent injury DO NOT open or tamper with internals of this device
4. Power surge/power loss could possibly reset smart device. If this happens follow setup instructions.

BrilliantSmart App screens may differ due to application updates & improvements.

Disposal

Please dispose of this packaging and product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 12 months from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 12 months of the date of purchase of the product.

Refer to our website brilliantlighting.com.au for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.
ABN 37 006 203 694
956 Stud Road Rowville, VIC 3178
Phone: 03 9765 2555

Email: warranty@brilliantlighting.com.au

MADE IN CHINA

Troubleshooting

Problem:
Smart device does not switch ON

Possible Cause	Suggested Solution
No Mains Power	Check connections, and status of power indicator

Problem:
Cannot link smart device with BrilliantSmart App

Possible Cause	Suggested Solution
1. Modem signal weak	Place device and modem closer together
2. Router/modem/smart phone firewall is enabled	Disable firewalls on all devices
3. Internet connection is down	Contact your provider
4. BrilliantSmart App not installed correctly	Remove App and re-install

For any other problems connecting your smart device to BrilliantSmart App please visit:
www.brilliantsmart.com.au/faqs

Brilliant Lighting
956 Stud Road
Rowville Vic 3178 Australia
www.brilliantlighting.com.au
Australian Sales
T 03 9765 2555
T 1800 817 754 (interstate only)
F 03 9763 0277
E warranty@brilliantlighting.com.au
New Zealand Sales
T 09 974 9618
E sales@brilliantlighting.co.nz



PATROL WiFi Pan
& Tilt Camera
21438/05



USER MANUAL

Box content

Smart WiFi Patrol Pan & Tilt camera
User Manual x 1
Raw Plugs x 3
Wall Screw x 2
Bracket x 1
Bracket Screws x 2
Pin x 1
Sheet Metal Stent x 1



Power Indicator light
Solid Blue Light: Device is Working
Blinking Blue Light: Start Connecting
Solid Red Light: Network Issue
Blinking Red Light: Waiting For WiFi Connection

Technical Specifications


Frequency: 2.4GHz
Storage: 16GB built-in
Adjust Angle: Tilt: -10°~75° ; Pan: 0°~355°
Sensor: 1/3" CMOS
Lens: 4.0mm F2.0
Resolution: 1920 x 1080
Audio: Two-Way Audio
Power Consumption: 5.5W Max
Power Input: DC 12V
Size: Ø75 x 105mm
Weight: 225g
Warranty: 1 year
Security: Mac Encryption; WEP/WAPI/TKIP/AES
WiFi Standard: IEEE802.11b/g/n
System Req's: iOS 8.0 or higher, Android 4.1 or higher

Installation

BEFORE INSTALLATION, PLEASE CHECK THAT THE LOCATION OF THE SMART DEVICE IS WITHIN RANGE OF YOUR HOME WIFI AND SIGNAL IS STRONG.

CEILING TYPE

1. Take the metallic components apart from bracket.
2. Fix the bracket on the ceiling with screws
3. Rotate the camera to snap into bracket.

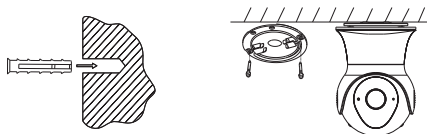

Push the expansion screw into the wall


WALL MOUNTING BRACKET

1. Fix the bracket on the wall with screws shown as the picture.
2. Rotate the camera to snap into bracket.

STEP 1



STEP 2



Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.
Your mobile phone and smart device needs to be within 2 bar range of your WiFi router.

Download the BrilliantSmart App

Please download the free BrilliantSmart App from the App store or Google Play store, or scan the QR code below.




Register the BrilliantSmart App

Open the BrilliantSmart App.
For new users, register a new account or if existing user, login with your user name and password.

Configure your BrilliantSmart App

Setting up your Home

You can setup multiple homes or locations. Click **'Add Home'** button. Or Click on **'Home'** top left if you are adding or modifying details then **'Home Management'** to setup your home(s), add or rename rooms and share devices.




Add your Smart Device to your App

1. On initial power-on, the camera will be in pairing mode. *If not successful, use pin to press re-set button for about 5-7 seconds. Tilt the camera head back to access the reset button. The camera will be in pairing mode shortly.*
2. Open the BrilliantSmart App, tap **'Add Device'** (if empty room) or **'+'** to add your smart device.
3. Select **'Smart Camera'** icon in the list of devices then press **'next step'**.
4. Turn on power adapter at power outlet.
5. After approximately 10 seconds you will hear a prompt tone.
6. Power indicator on camera will now start to blink red. If camera is blinking then press **'next step'**. Continue following connection guide.



7. Enter your WiFi password and press **'Confirm'**.
8. Once connected to your home WiFi, scan the **'QR Code'** with smart camera. Hold **'QR Code'** approx. 20 cm in front, facing the smart camera lens.



9. Wait for **'Camera Configured'** then select **'Heard the Beep'**

The Camera will now start connecting to the App.
Wait until 100% complete.

