


7. The Camera will now start connecting to the app. Wait until 100% complete.



8. Once connected you'll get a menu 'Device added successfully'. Select the room your device is to be located. You can click on the pen to change the device name, then press 'Done'.



9. The smart device can now be controlled by the BrilliantSmart app.

If you have problems connecting to your WiFi, please try connecting via AP Mode or for more troubleshooting go to our website [www.brilliantsmart.com.au](http://www.brilliantsmart.com.au).

**Go to [brilliantsmart.com.au](http://brilliantsmart.com.au) for full instructions and features.**

### Warning

1. BrilliantSmart app screens may differ due to application updates & improvements.
2. Please use the device as per instructions.
3. To prevent injury DO NOT open or tamper with internals of this device
4. Power surge/power loss could possibly reset smart device. If this happens follow setup instructions.

**BrilliantSmart app screens may differ due to application updates & improvements.**

### Disposal

Please dispose of this packaging and product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

### Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 12 months from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 12 months of the date of purchase of the product.

Refer to our website [brilliantlighting.com.au](http://brilliantlighting.com.au) for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.  
ABN 37 006 203 694  
956 Stud Road Rowville, VIC 3178  
Phone: 03 9765 2555

Email: [warranty@brilliantlighting.com.au](mailto:warranty@brilliantlighting.com.au)  
MADE IN CHINA

### Troubleshooting

**Problem:**  
Smart device does not switch ON

| Possible Cause | Suggested Solution                    |
|----------------|---------------------------------------|
| No Mains Power | Check connections, fuses and switches |

**Problem:**  
Cannot link smart device with BrilliantSmart app

| Possible Cause                                  | Suggested Solution                     |
|-------------------------------------------------|----------------------------------------|
| 1. Modem signal weak                            | Place device and modem closer together |
| 2. Router/modem/smart phone firewall is enabled | Disable firewalls on all devices       |
| 3. Internet connection is down                  | Contact your provider                  |
| 4. BrilliantSmart app not installed correctly   | Remove app and re-install              |

For any other problems connecting your smart device to BrilliantSmart app please visit:  
[www.brilliantsmart.com.au/faqs](http://www.brilliantsmart.com.au/faqs)

**Brilliant Lighting**  
956 Stud Road  
Rowville Vic 3178 Australia  
[www.brilliantlighting.com.au](http://www.brilliantlighting.com.au)  
**Australian Sales**  
T 03 9765 2555  
T 1800 817 754 (interstate only)  
F 03 9763 0277  
E [warranty@brilliantlighting.com.au](mailto:warranty@brilliantlighting.com.au)  
**New Zealand Sales**  
T 09 974 9618  
E [sales@brilliantlighting.co.nz](mailto:sales@brilliantlighting.co.nz)




**ZIP WiFi Camera**  
21436/05



**USER MANUAL**

## Box content

Smart Wifi Zip Camera x 1  
USB Cable x1 (for charging only)  
Dome mounting base x 1  
Elbow Mounting base x 1  
Mounting screws x 4  
Rawl plugs x 4  
User Manual x 1

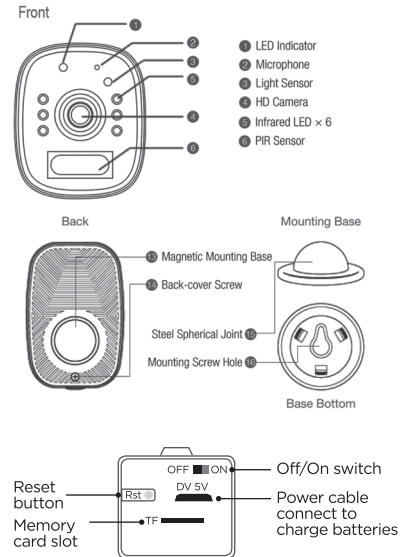

1

## Technical Specifications

1080p 2.0 Megapixel 110  
Wide viewing angle camera  
Supports PIR Motion detection  
Notification to App when motion detected.  
6 x IR LED for Night vision  
High Quality two-way Audio  
Supports MicroSD card up to 128GB

**Weight:** 349g camera only  
450g with accessories

**Weather Rating:** IP65

**Low Consumption:** 4 x 18650 Lithium batteries

**Battery life:** up to 6 months standby time  
up to 3 months working time

**Power input:** DC5V 1A-2A

**Warranty:** 1 year

**Security:** Mac Encryption; WEP/WAPI/TKIP/AES

**WiFi Standard:** IEEE802.11b/g/n

**System Req's:** iOS 8.0 or higher, Android 4.1 or higher

**When installing and positioning your smart cameras be aware of State, Territory and local surveillance and monitoring laws.**

Please follow this link for more information regarding privacy laws and cameras:

<https://www.oaic.gov.au/privacy/your-privacy-rights/surveillance-and-monitoring/security-cameras>


2

## Installation

**BEFORE INSTALLATION, PLEASE CHECK THAT THE LOCATION OF THE SMART DEVICE IS WITHIN RANGE OF YOUR HOME WIFI AND SIGNAL IS STRONG.**

Drill holes and install rawl plug in desired location

Install screw and dome mounting base (allow screw to protrude 3mm from mounting surface).

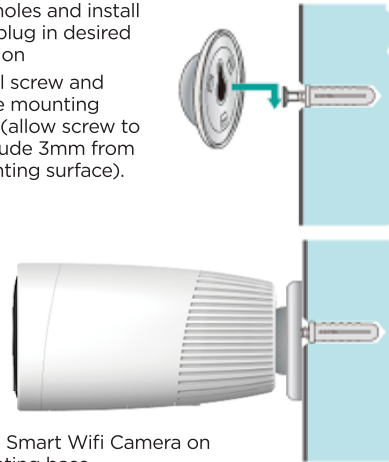

Place Smart Wifi Camera on mounting base

**THE CAMERA BATTERIES MUST BE CHARGED FOR AT LEAST 8-12 HOURS BEFORE USE.**  
**Remove rubber cover and insert cable and plug into a power socket to charge.**

3


## Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.

Your mobile phone and smart device needs to be within 2 bar range of your WiFi router.

## Download the BrilliantSmart App

Please download the free BrilliantSmart app from the App store or Google Play store, or scan the QR code below.



## Register the BrilliantSmart App


Open the BrilliantSmart app.

For new users, register a new account or if existing user, login with your user name and password.

## Configure your BrilliantSmart App

### Setting up your Home


You can setup multiple homes or locations. Click 'Add Home' button. Or Click on 'Home' top left if you are adding or modifying details then 'Home Management' to setup your home(s), add or rename rooms and share devices.



## Add your Smart Device to your App



Once batteries are charged, remove rubber cover and turn on the switch.

1. On initial power-on, the indicator light is red. Pay attention to the voice instruction to connect the camera. After approx 5 seconds the indicator light flashes blue and camera says 'the camera is now ready for pairing'.



2. Open the BrilliantSmart App, tap 'Add Device' (if empty room) or '+' to add your smart device.
3. Select 'Smart Camera' in the list of devices then press 'next step'.

4. Enter your WiFi password.

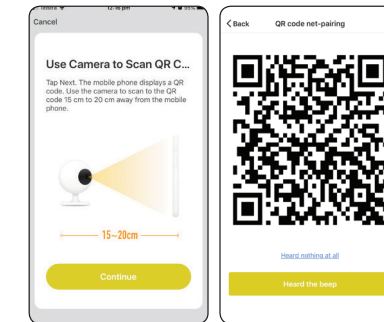

5. Scan the 'QR Code' with smart camera. Hold 'QR Code' (on your phone) approx. 15-20 cm in front, facing the smart camera lens.
6. Indicator light turns purple then blue and beeps. Select 'I Heard a Prompt'.

6