

Installation Manual

May 12, 2023 2:39 PM

DEEP-9

Variants	Item No.	Colour Temp
Wht		
20815	DEEP-9-WHT	TRIO

Description: Deepset LED Downlight


Thank you for purchasing your new DEEP-9-TRIO downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	240V AC	Lumen (±5%):	Warm White 3000K - 785lm Neutral White 4000K - 920lm White 5000K - 865lm	Dimmable:	Yes
Power:	9W	Beam Angle:	60°	Operating Temp:	-20°C~45°C
IP Rating:	IP54	CCT:	3000K - 4000K - 5000K (Switchable)	Cutout:	90mm
CRI:	≥90	Lifespan:	40,000Hrs		


Step 1

Open a hole according to the cutout size of led downlight.




Step 2

Choose desired colour temperature




Step 2

Connect to power.





Step 3

Hold back the spring clips and insert into the hole.




Step 3

Release the spring clips and let the downlight fit into the hole.



90°C limit on side or top or mounting surface of luminaire

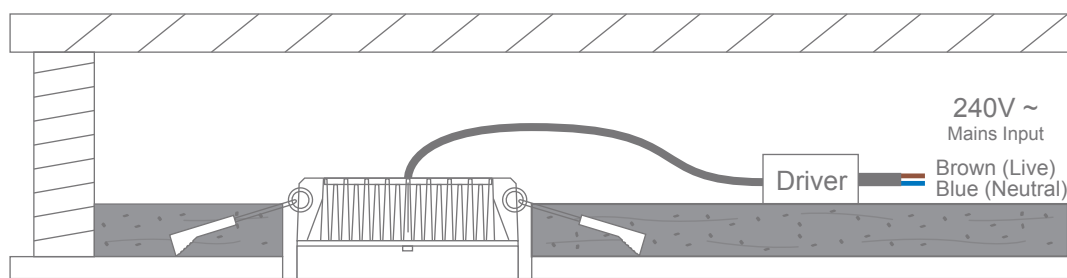

Note:

- The Luminaire and the driver are NOT suitable for covering with insulation material.
- If the external flexible cable is damaged, it needs to be replaced by the manufacturer or his service agent.
- The light source of this luminaire is not replaceable; at the end of life the whole luminaire should be replaced.

Note:

- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product

- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas